


BRIDLE

Calypso II Rainbow

112322

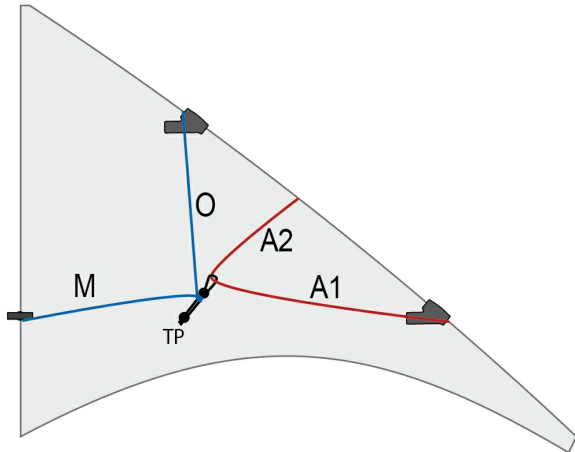

O = 43 cm ; M = 37 cm ; A = 56 cm (Gleitschenkel)
(A1 = 30 cm ; A2 = 26 cm)

MATERIAL

Beginner (Beach & Fun)


INFOS

KATEGORIE <input checked="" type="checkbox"/> Beginner <input type="checkbox"/> Advanced <input type="checkbox"/> Master <input type="checkbox"/> Allround <input type="checkbox"/> Trick <input type="checkbox"/> Traction <input type="checkbox"/> Precision <input type="checkbox"/> Freestyle <input type="checkbox"/> Team <input type="checkbox"/> Low Wind	WINDBEREICH		OPT. WIND	
	6 - 38	KM/H	25	KM/H
	4 - 24	MPH	16	MPH
	2 - 5	BFT.	4	BFT.
	3 - 21	KNOT.	13	KNOT.
SCHNUR				
15 - 25	kp	15 - 25	m	
30 - 50	lbs	45 - 80	ft	

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Lower Spreader	ø4 mm Fiberglas Spar	1	780
	Spine	ø4 mm Fiberglas Spar	1	480
	Leadingedge	ø4 mm Fiberglas Spar	2	780
	Standoff	ø2 mm Solid Fiberglas Rod	2	280

ABMESSUNGEN

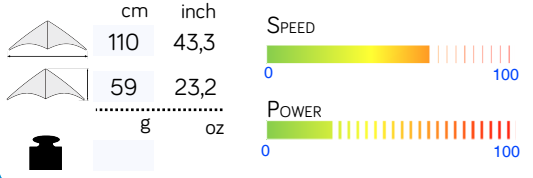

HINTS & TIPPS

Empty box for hints and tips.

SAIL MATERIAL

Ripstop Polyester

INCLUDED ACCESSORIES

Quiver
Flyinglines: Polyester 2 x 20 m, 20 kp on spools
Instructions

PRODUCT INTRODUCTION

PRODUCT CLEARING

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144400	Leadingedge/Spine	HQ Endcap, moulded, ø4 mm	4
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
153424	Leadingedge	HQ LE-Connector ø4 mm angled	2
153490	Spine	Rubber Ring ø10/4 mm	1
153610	Lower Spreader	HQ Spreader Connector "Bone" 4 mm	1
144200	Standoff	HQ Endcap, moulded, ø2 mm	4
153492	Leadingedge	C-Clip 4 mm	4
153640	Leadingedge	HQ Split Nock ø4 mm	2
153612	Spine/Lower Spreader	HQ Spreader Connector "Bone" ø5 mm	1